


## MANUAL WATER SOFTENER LT8



### TECHNICAL DATA

Height . . . A . . . . . mm 400  
 Weight . . . . . Kg 7,5  
 Supply water pressure . . . . . min 1 bar, max 8 bar  
 Maximum flow rate recommended . . . . . 1000 l/h  
 Room temperature . . . . . min 4°C - max 25°C  
 Salt content per regeneration . . . . . 1 kg

### WATER NETWORK CONNECTIONS

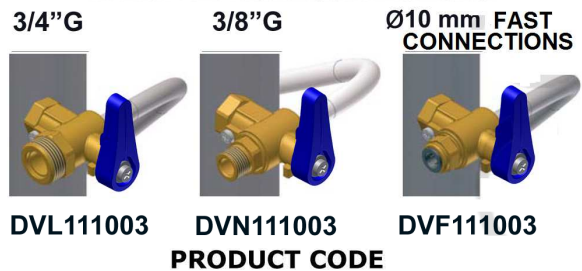

### SUPPLY WATER CHARACTERISTICS

- Drinking water
- Temperature: min 4°C - max 25°C
- Crystal-clear water (SDI 1)
- Maximum hardness 90°f

### THE PACKAGING CONTAINS:

- 1 steel AISI 304 cylinder holding 8 litres
- 5.6 litres of cationic resins adapt for softening
- 1 instruction manual
- 1 unloading pipe

| LITRES OF SOFTENED WATER ACCORDING TO ITS HARDNESS |      |      |     |     |     |                        |
|----------------------------------------------------|------|------|-----|-----|-----|------------------------|
| °f                                                 | 20   | 30   | 40  | 50  | 60  | CYCLIC                 |
| °d                                                 | 11   | 16   | 22  | 28  | 33  | CAPACITY               |
| ppm CaCO <sub>3</sub>                              | 200  | 300  | 400 | 500 | 600 | [ m <sup>3</sup> .°f ] |
|                                                    | 1680 | 1120 | 840 | 672 | 560 | 33.6                   |

### THE WATER SOFTENER IS SUITED FOR:

