

MALAGA (C-PN-W)



STANDARD EQUIPMENT

- Energy-efficient LED lighting
- Energy-saving refrigerating unit
- Supply of warm air onto the glass
- Rack - RAL 7047 or gold colour
- Electronic temperature controller with digital display
- Feet for levelling the device
- Sliding door
- Dynamic cooling
- Wooden casing
- Illuminated lower front panel
- Defrosting (automatic)
- Automatic condensate evaporation
- Height adjustable display shelves



INTERIOR TEMPERATURE RANGE
+5°C TO +15°C*



DYNAMIC
COOLING



TILTABLE FRONT GLASS



REFRIGERANT 449A



OPTIONAL EQUIPMENT

- Eco leather finishing (front)
- Humidity control system
- Serial connection
- Bogie bumper
- Without casing
- Different colour of frame profiles



ALTERNATIVE VERSIONS




CASHDESK



NEUTRAL
VERSION

Cold

*At an ambient temperature of +25°C and humidity of 60%

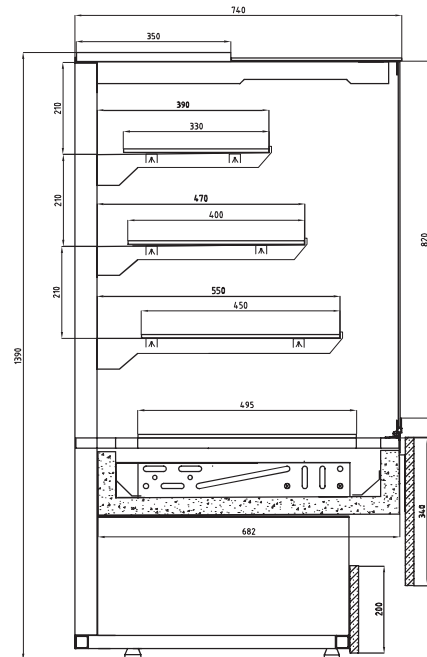

MODULES

SYMBOL	LENGTH INCLUDING SIDES** [mm]	DISPLAY AREA [m ²]	UNIT	WEIGHT [kg]
C-09 PN-w	940	1,65	+	215
C-13 PN-w	1340	2,39	+	260
C-17 PN-w	1740	3,12	+	280
C-09 PN-w B/A	940	1,65	-	195
C-13 PN-w B/A	1340	2,39	-	240
C-17 PN-w B/A	1740	3,12	-	260



Cooling capacity requirements at $t_a = +15^\circ\text{C}$: 500 W/linear meter

*At an ambient temperature of +25°C and humidity of 60%

